

530,449

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/034482 A2

(51) International Patent Classification⁷: **H01L 45/00,**
27/24

(21) International Application Number:
PCT/IB2003/003865

(22) International Filing Date: 25 August 2003 (25.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02079220.6 11 October 2002 (11.10.2002) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LANKHORST, Martijn, H., R.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **DE THELJE, Femke, K.** [NL/NL];
c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

MEINDERS, Erwin, R. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **WOLF, Ronald, M.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(74) Agent: **DULJVESTIJN, Adrianus, J.**; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTRIC DEVICE COMPRISING PHASE CHANGE MATERIAL

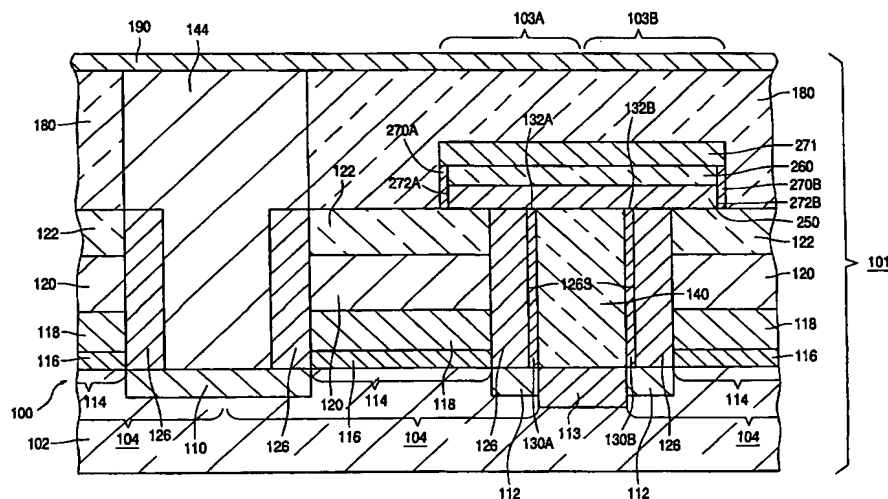

(57) **Abstract:** The electric device (1, 100) comprises a resistor (36, 250) comprising a phase change material which is able to be in a first phase and in a second phase. The resistor (36, 250) has an electrical resistance which has a first value when the phase change material is in the first phase and a second value when the phase change material is in the second phase. The resistor (36, 250) is electrically connected to a first conductor (3, 130A, 130B) and a second conductor (4, 270), which are able to conduct a current for heating of the phase change material to enable a transition from the first phase to the second phase. The electric device (1, 100) further comprises a layer (20, 39, 126, 140, 260) of a dielectric material for reducing a heat flow to parts of the body (2, 101) free of the resistor (36, 250) during the heating, which dielectric material according to the invention comprises a porous material with pores having a size between 0.5 and 50 nm.

WO 2004/034482 A2